

INT232-A

TTL TO RS232 CONVERTOR BOARD

Designed for embedding into products manufactured by third-parties, this unit is a simply low cost RS232 adapter board for converting TTL level logic to RS232 levels for communicating with PC's, dumb terminals or other standard devices utilizing a RS232 serial port.

- **1 transmit and 1 receive line, full duplex.**
- **Small unit size: 48mm x 36mm**
- **On board DB9 female connector for direct connect to a serial port.**
- **4 mounting holes**
- **Data rates up to 120kbps when loaded in accordance with the EIA/TIA-232E specification.**




Connector Pin Description:

DB9 female (J2)	Description
2 (output)	RS232 Output
3 (input)	RS232 Input
5	GND Signal ground

4 way Con. (J1)	Description
1 (output)	RX TTL Output
2 (input)	TX TTL Input
3	+5V Supply
4	GND Signal ground

Dimensions:

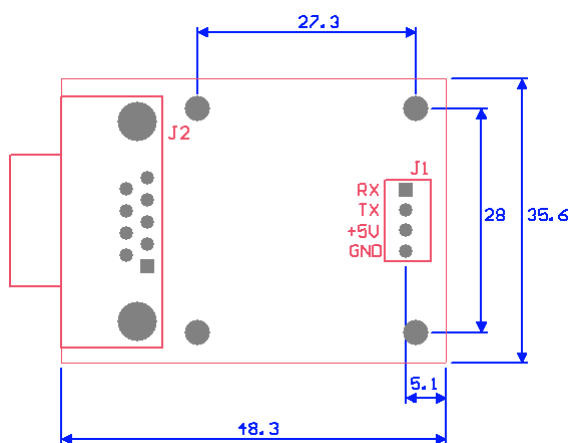

All dimensions in mm.